

# YARDMASTER<sup>®</sup> PRODUCT GUIDE

PUMPS



STIRRERS



SEPARATORS



MANAGEMENT  
& ACCESSORIES



REID &  
HARRISON  
Pumps & Systems

**Yardmaster<sup>®</sup>**




RIGHT PUMP  
TROUBLE-FREE  
NON-CLOG DESIGN  
FOR THE JOB

# Yardmaster® PUMPS

## EFFLUENT PUMPS

### FOR 'PROCESSED' IRRIGATION

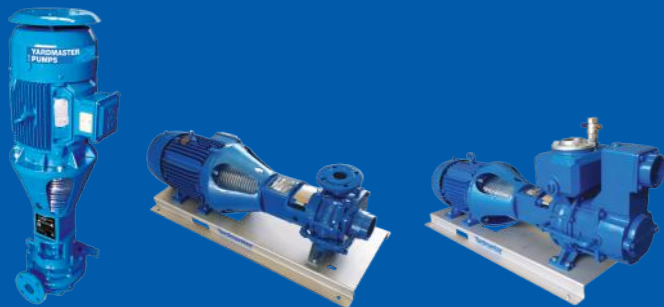

#### Multi-stage Vertical

##### IDEAL FOR

- Floating Frames
- High efficiency /pressure
- Green water / Small solids

#### Multi-stage Horizontal

##### IDEAL FOR

- Flood feed applications
- High efficiency /pressure
- Green water / Small solids

#### Self-Priming Multi-stage

##### IDEAL FOR

- Shore Mounting
- High efficiency /pressure
- Green water / Small solids

### FOR IRRIGATION



#### Horizontal Pump

##### IDEAL FOR

- Flood feed applications
- High speed irrigation pump
- Green water with solids

#### Vertical Pump

##### IDEAL FOR

- Floating Frames
- High speed irrigation pump
- Green water with solids

#### Extender Pump

##### IDEAL FOR

- Deep Sumps
- High speed irrigation pump
- Green water with solids

### FOR VOLUME TRANSFER



#### High Volume Pump

##### IDEAL FOR

- Volume transfer
- Green water with solids

#### Heavy Duty Pump

##### IDEAL FOR

- Volume transfer
- Liquid with solids
- Industrial applications

#### PTO Pump

##### IDEAL FOR

- Volume transfer
- Green water with solids

#### Trough Pump

##### IDEAL FOR

- Emptying of troughs
- Water with solids

### FOR TRANSFER



#### Horizontal Pump

##### IDEAL FOR

- Flood feed applications
- Transfer pump
- Green water with solids

#### Vertical Pump

##### IDEAL FOR

- Floating Frames
- Transfer pump
- Green water with solids

#### Extender Pump

##### IDEAL FOR

- Deep Sumps
- Transfer pump
- Green water with solids

### Multi-Stage Pump Performance Overview

CODE	RHMS2PS110	RHMS2PS150	RHMS3PS150	RHMS3PS185	RHMS4PS185	RHMS4PS220
MOTOR SIZE (kW)	11	15	15	18.5	18.5	22
RPM	2950	2950	2950	2950	2950	2950
IMPELLER Ø (mm)	200, 162	218, 162	200, 162x2	218, 162x2	200, 162x3	218, 162x3
FLOW RANGE (L/S)	0-10.5	0-14.0	0-14.9	0-17.4	0-17.0	0-18.0
HEAD (m)	74	81	103	111	134	139

### Self-Priming Multi-Stage Pump Performance Overview

CODE	RHMP2PS110	RHMP2PS150	RHMP3PS150	RHMP3PS185	RHMP4PS185	RHMP4PS220
MOTOR SIZE (kW)	11	15	15	18.5	18.5	22
RPM	2950	2950	2950	2950	2950	2950
IMPELLER Ø (mm)	215, 143	218, 162	218, 143, 143	218, 162x2	218, 143, 143, 162	218, 162, 162, 143
FLOW RANGE (L/S)	0-16.7	0-16.7	0-16.6	0-17	0-15.7	0-16.6
HEAD (m)	76	84	103	111	123	139

### Irrigation Pump Performance Overview

CODE	RH5S	RH5B	RH6A	RH7	RH8	RH9	RH10
MOTOR SIZE (kW)	4	5.5	7.5	11	15	18.5	22
RPM	2900	2935	2935	2950	2950	2950	2950
IMPELLER Ø (mm)	127	145	156	178	200	210	215
FLOW RANGE (L/S)	0-8	0-8	0-13	0-7	0-7	0-7	0-9
HEAD (m)	19	28	32	46	61	69	75

### High Volume Pump Performance

CODE	RH4.HV3	RH6.HV4
MOTOR SIZE (kW)	4	7.5
RPM	1400	1400
FLOW RANGE (L/S)	0-20	0-40
HEAD (m)	15.5-11.5	12.9-9.5

### PTO Pump Performance

CODE	RHPTO.V	RHPTO.H
PTO RPM	540	540
IMPELLER Ø (mm)	200	200
FLOW RANGE (L/S)	0-19	0-19
HEAD (m)	64	64


*Product Guide: 2024v23.  
Contents of this Product Guide are copyright to Reid & Harrison 1980 Ltd. No text or images are to be reproduced in any form or medium without prior written consent. Specifications are subject to change without notice.*

### Transfer Pump Performance Overview

CODE	RH1	RH2	RH3	RH4	RH6
MOTOR SIZE (kW)	0.75	1.5	2.2	4	7.5
RPM	1400	1400	1400	1400	1400
IMPELLER Ø (mm)	150	178	200	215	220
FLOW RANGE (L/S)	0-2.8	0-6.5	0-7	0-14	0-15
HEAD (m)	5	11	15.5	18.2	19.4

### Trough Pump Performance

CODE	RHHYD
TRACTOR RPM (max)	1000
PRESSURE (psi)	40
IMPELLER Ø (mm)	123
FLOW (L/S)	10

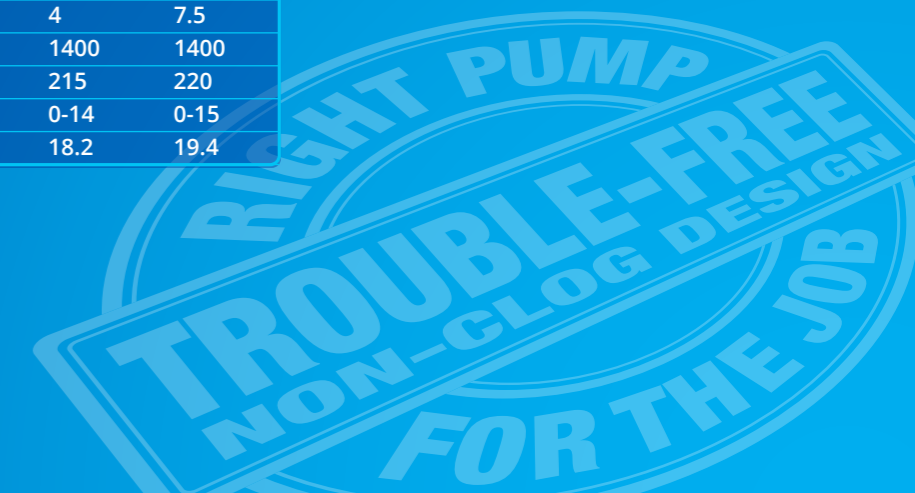

DESIGNED & MANUFACTURED BY:

REID & HARRISON (1980) Ltd 1 Waihou St, PO Box 254, Matamata 3440, New Zealand. Ph: 07 888 8224

Email: martin@yardmaster.co.nz

[www.yardmaster.co.nz](http://www.yardmaster.co.nz)

# Yardmaster® PUMPS

Introductory  
'New Product' Warranty:  
*this product comes with a...*  
**2 Year Extended  
Manufacturer's Warranty\***

\* Refer to Yardmaster® Standard  
Warranty Terms & Conditions

## EFFLUENT PUMPS

### FOR 'PROCESSED' IRRIGATION



# NEW

#### Progressive Cavity Pump

##### IDEAL FOR

- Constant flow
- High Efficiency
- Green water / small solids

##### FEATURES

- Pressure: Up to 240m Head
- Volume: Up to 55m³/hr
- Temperature Range: -10 to 100 degrees C
- Suction Lift: Up to 8.5m
- 4kW - 30kW Power options
- Six rotor speed options for each model
- Construction: Cast iron, Chrome plated rotor and Natural rubber stator

##### BENEFITS

- Shore Mounted Solution - Maintenance made safe
- Constant Flow - Easy to apply to any system
- Power Efficient - Lower running costs

#### Progressive Cavity Pump Performance Overview

CODE	PC12-040-203	PC12-055-245	PC12-055-284	PC12-075-356	PC12-075-420	PC12-075-477
MOTOR SIZE (kW)	4	5.5	5.5	7.5	7.5	7.5
ROTOR RPM	203	245	284	356	420	477
MAX HARD PARTICLE SIZE (mm)	12	12	12	12	12	12
MAX SOFT CLUMP SIZE (mm)	36	36	36	36	36	36
FLOW RANGE (L/S)	1.5-2.8	2.1-3.3	2.8-4.2	3.6-5.0	5.2-5.8	6.2-6.7
MAX HEAD (m)	120	120	120	120	100	90

CODE	PC22-055-203	PC22-075-245	PC22-110-284	PC22-110-356	PC22-110-420
MOTOR SIZE (kW)	5.5	7.5	11	11	11
ROTOR RPM	203	245	284	356	420
MAX HARD PARTICLE SIZE (mm)	14	14	14	14	14
MAX SOFT CLUMP SIZE (mm)	44	44	44	44	44
FLOW RANGE (L/S)	3.3-4.7	3.5-5.6	5.1-6.7	6.7-8.1	8.5-9.7
MAX HEAD (m)	100	120	120	120	100

CODE	PC32-110-245	PC32-110-284	PC32-150-356	PC32-150-420
MOTOR SIZE (kW)	11	11	15	15
ROTOR RPM	245	284	356	420
MAX HARD PARTICLE SIZE (mm)	13	13	13	13
MAX SOFT CLUMP SIZE (mm)	44	44	44	44
FLOW RANGE (L/S)	5.9-7.8	7.5-9.2	9.0-11.5	12.5-13.3
MAX HEAD (m)	120	110	120	100

Imported.  
Assembled  
& Tested in NZ

CODE	PC34-150-203	PC34-185-245	PC34-220-284	PC34-220-356	PC34-220-420
MOTOR SIZE (kW)	15	18.5	22	22	22
ROTOR RPM	203	245	284	356	420
MAX HARD PARTICLE SIZE (mm)	13	13	13	13	13
MAX SOFT CLUMP SIZE (mm)	44	44	44	44	44
FLOW RANGE (L/S)	4.5-6.6	5.8-7.5	8.3-9.2	9.7-11.4	12.3-13.6
MAX HEAD (m)	200	200	240	180	150

# Yardmaster® PUMPS

## EFFLUENT PUMPS

### FOR TRANSFER



#### Submersible Pump

##### IDEAL FOR

- Feeding mechanical separators
- Transfer pump
- Green water with solids

Imported. Trialled & Tested in NZ.

#### Submersible Pump V Series Performance Overview

CODE	RHV080152344	RHV080152345	RHV100152348	RHV100152349	RHV100152350
MOTOR SIZE 4(kW)	2.2	3	1.7	2.2	3
RPM	1450	1450	1450	1450	1450
FREE PASSAGE (mm)	80	80	100	100	100
IMPELLER TYPE	Vortex	Vortex	Vortex	Vortex	Vortex
IMPELLER Ø (mm)	190	207	155	190	207
FLOW RANGE (L/S)	0-28	0-32	0-20	0-24	0-32
HEAD (m)	10.3-2.0	12.6-2.0	5.6-2.3	8-2.5	10.3-2.0

#### Submersible Pump Alpha Series Performance Overview

CODE	RHAlphaC1M/G	RHAlphaEVO2M/G	RHAlphaEVO32M/GR	RHAlphaEVO55M/T	RHAlphaPRO55T	RHAlphaEVO60T
MOTOR SIZE (kW)	0.28	0.56	0.75	1.5	1.5	2.2
RPM	2850	2850	2850	2850	2850	2850
FREE PASSAGE (mm)	30	35	40	45	50	50
IMPELLER TYPE	Vortex	Vortex	Vortex	Vortex	Vortex	Vortex
IMPELLER Ø (mm)	90	96	104	120	110	125
FLOW RANGE (L/S)	0-2.5	0-4	0-8	0-9	0-10	0-11
HEAD (m)	7-1	9-2	10-2	14-2.5	14.5-2	16.5-3

Product Guide: 2024v23. Contents of this Product Guide are copyright to Reid & Harrison 1980 Ltd. No text or images are to be reproduced in any form or medium without prior written consent. Specifications are subject to change without notice.

#### IMPORTED, ASSEMBLED & TESTED BY:

REID & HARRISON (1980) Ltd 1 Waihou St, PO Box 254, Matamata 3440, New Zealand. Ph: 07 888 8224

Email: martin@yardmaster.co.nz

[www.yardmaster.co.nz](http://www.yardmaster.co.nz)

# Yardmaster® STIRRERS

## STIRRERS

FOR SUMPS, PONDS OR TANKS



### Vertical Stirrer

#### IDEAL FOR

- Floating Frame mounting or Fixed mounting
- Small tanks, sumps or ponds

### Right Angle Stirrer

#### IDEAL FOR

- Floating Frame mounting or Fixed mounting
- Larger tanks, sumps or ponds
- Strong agitation

### Shore Mounted Stirrer

#### IDEAL FOR

- Shore mounting
- Large ponds
- Safe access

### Submersible Stirrer

#### IDEAL FOR

- Sumps or tanks
- Easy access when fitted with a Yardmaster lifting frame
- 1.5kW & 3kW - Stainless steel
- 6kW & 7.5kW - Cast iron, steel

## Vertical Stirrer Performance Overview Right-Angle Stirrer Performance Overview

CODE	RHST2	RHST4	RHST6
MOTOR SIZE 4P (kW)	1.5	4	7.5
PROPELLER RPM	100	100	100
PROPELLER SIZE (mm)	250	600	960
SUMP/POND SIZE (m³)	Up to 20	20-100	100-1000

CODE	RHSRS4	RHSRS6	RHSRS7A
MOTOR SIZE 4P (kW)	4	7.5	11
PROPELLER RPM	300	300	300
PROPELLER SIZE (mm)	480	590	675
SUMP/POND SIZE (m³)	Up to 500	Up to 2000	>3000

## Submersible Stirrer Performance

CODE	RHSTSC015A	RHSTSC030A	RHSTS060A	RHSTS075A
MOTOR SIZE (kW)	1.5	3	6	7.5
PROPELLER RPM	960	740	350	350
PROPELLER SIZE (mm)	260	400	545	570
THRUST (N)	290	920	TBA	TBA
TANK SIZE (m³)	30	Up to 800	Up to 1700	Up to 2000

## Shore Mounted Stirrer Performance Overview

CODE	SHS075075	SHS075099	SHS110075	SHS110099
MOTOR SIZE (kW)	7.5	7.5	11	11
PROPELLER RPM	400	400	400	400
PROPELLER SIZE (mm)	440	440	470	470
LENGTH (m)	7.5	9.9	7.5	9.9
SUMP/POND SIZE (m³)	Up to 3000	Up to 3000	3000-9000	3000-9000

# Yardmaster® SEPARATORS

## SEPARATORS



### Inclined Screw Separator (YS)

#### IDEAL FOR

- Entry level separator
- Easiest installation in existing effluent systems
- Handles most duties
- May be used as primary separator

### Rotary Drum Separator (RDS)

#### IDEAL FOR

- Low power requirements
- Moderate dry solids
- Low wear & maintenance

### Static Screen Separator (SS)

#### IDEAL FOR

- No power
- No moving parts
- Can be used as primary separator

### Centrififer™ (C)

#### IDEAL FOR

- Fine particles
- Secondary separator
- Minimises pond settlement

## Separator Performance Overview

CODE	YS200C	YS200	YS300	RDS25	RDS60	SS30	C50
MOTOR SIZE (kW)	2.2	3	4	0.75	1.5	N/A	4
RPM	1450	1450	1450	1450	1450	N/A	1450
AUGER/DRUM RPM	29	29	29	19	15	N/A	600
SCREEN SIZE (mm)	3/4/2(s)	3/4/2(s)	3/4/2(s)	0.5 & 1(s)	0.5 & 1(s)	0.5(s)	0.025-0.25
CAPACITY (m3/hr)*	25**	30	40	30	40	20	50

\* Based on <10% solids loading).

\*\* Grass fed only.

s - Stainless steel

Product Guide: 2024v23. Contents of this Product Guide are copyright to Reid & Harrison 1980 Ltd. No text or images are to be reproduced in any form or medium without prior written consent. Specifications are subject to change without notice.

DESIGNED & MANUFACTURED BY:

REID & HARRISON (1980) Ltd 1 Waihou St, PO Box 254, Matamata 3440, New Zealand. Ph: 07 888 8224

Email: martin@yardmaster.co.nz

[www.yardmaster.co.nz](http://www.yardmaster.co.nz)

# Yardmaster® MANAGEMENT

# HALO®

**SUPERSMART** | Effluent Monitoring & Control



Online HALO Dashboard - Example only



## Halo Supersmart Monitoring & Control

### KEY FEATURES INCLUDE:

- Enables the application of effluent at a controlled rate
- The VSD will adjust motor speed to required effluent disposal rate
- Monitor flow with auto shut-off when interrupted or compromised
- Text alerts when system stops, cause notification
- Pump run feedback with remote start/stop
- Pressure guard
- Pond level management, including freeboard alerts
- Programmable application
- Metering of applied volumes
- Manage up to six zones remotely

### SIZES

11kW, 15kW, 18.5kW and 22kW VSD pump controller  
All capable of running a 7.5kW DOL stirrer in tandem.

### IDEAL FOR

- Flow control for varying applications
- Easy control by smart devices
- Monitored flow with auto shut off
- Environmental compliance recording

### FUTURE EXPANSION

This HALO platform has the capacity to work seamlessly with our wider suite of farm management systems. Monitor milk vat storage, primary cooler efficiency, water usage, tank storage, silo level alerts, weather stations and much more.

The YARDMASTER® SUPERSMART platform can be tailored to match the requirements of your farm and you can choose from a range of additional options.

All farm data is accessible via the secure HALO Dashboard from any web-enabled device, anywhere in the world.

Operate system remotely, view system status, live data, check trend graphs, download historical information and update system settings easily from your phone, tablet or computer.

# Yardmaster® ACCESSORIES

## FRAMES & PLATFORMS



### Floating Frame/ Control Arm

#### IDEAL FOR

- Irrigation pumps & stirrers
- Sumps and ponds



### Tank Frames

#### IDEAL FOR


- For covering 3.4m tanks



### Submersible Stirrer and Pump Frames

#### IDEAL FOR

- Servicing Submersible pumps & stirrers in sumps
- Above ground tanks without affecting tank construction




### Platforms

#### IDEAL FOR

- Positioning separators over solids bunker

## FOR PUMPS



### Cutter Blades

#### IDEAL FOR

- Yardmaster standard pumps



### Inline Cutter

#### IDEAL FOR

- Eliminating blockages in multistage pumps caused by leaves & debris
- 4kW motor



### Pump Covers

#### IDEAL FOR

- Weather protection for pump motors



### Pump suction extensions

#### IDEAL FOR

- Yardmaster standard pumps



### Automatic Greaser

#### IDEAL FOR

- Applying constant supply of grease over 12 month period
- Floating frame systems



### Float Control Switch

#### IDEAL FOR

- Pump and stirrer control
- Sumps and ponds


## OTHER ACCESSORIES



### Headworks

#### IDEAL FOR

- Mainline irrigation distribution



### Pot Spray

#### IDEAL FOR

- Static Irrigation



### Irrigator on sled

#### IDEAL FOR

- Static Irrigation



### Yardmaster Hydrant Wash System

#### IDEAL FOR

- Feed pad wash down

## Floating Frame Configuration

CODE	DESCRIPTION	Max Pump SIZE (Kw)		Max Vertical Stirrer SIZE (Kw)
AYPD300xx	3 Drum Frame	7.5	or	7.5
AYPD4601xx	4 Drum Single Mount Frame	18.5	or	7.5
AYPD4602xx	4 Drum Double Mount Frame	7.5	and	4
AYPD4611xx	4 Drum Right Angle Stirrer Frame			*11
AYPD6601xx	6 Drum Single Mount Frame	22	or	7.5
AYPD6602xx	6 Drum Double Mount Frame	18.5	and	7.5


Product Guide: 2024v23. Contents of this Product Guide are copyright to Reid & Harrison 1980 Ltd. No text or images are to be reproduced in any form or medium without prior written consent. Specifications are subject to change without notice.

\*Right angle stirrer only



# YARDMASTER® IRRIGATION PUMP PERFORMANCE CURVES

Performance Curves - TWO POLE (2800 rpm)

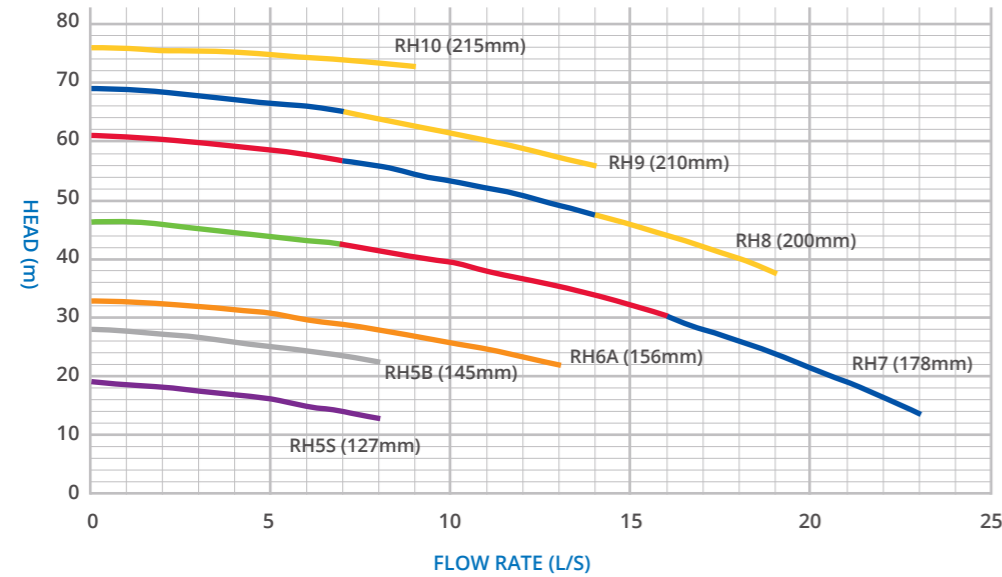


	kW	HP
(Impeller Size)	4	5
	5.5	7.5
	7.5	10
	11	15
	15	20
	18.5	25
	22	30



# YARDMASTER® TRANSFER PUMP PERFORMANCE CURVES

Performance Curves - FOUR POLE (1400 rpm)

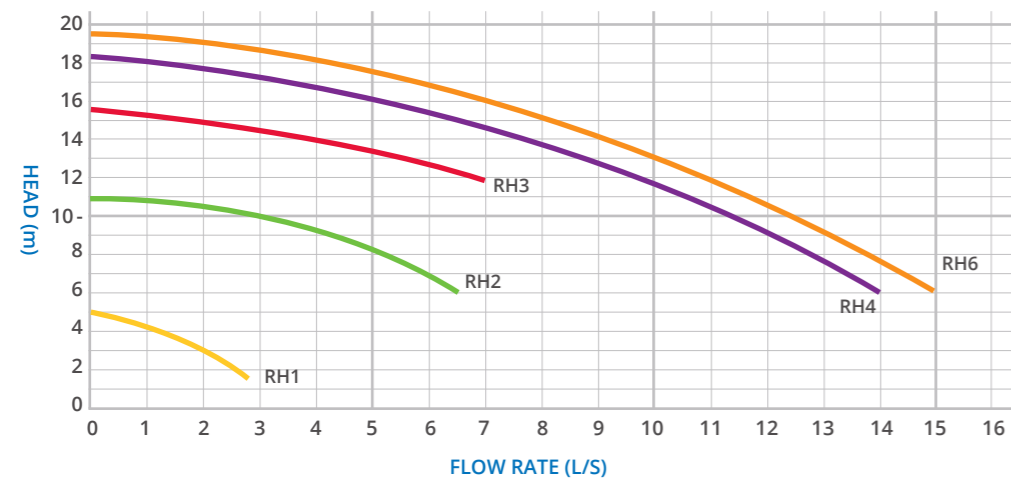


	IMP	kW	HP
RH1	150	0.75	1
RH2	178	1.5	2
RH3	200	2.2	3
RH4	215	4	5
RH6	220	7.5	10

The performance curves stated above are those for water. When slurries, manures and effluent are to be pumped, delivery, head and power will change. Yardmaster pumps require back pressure, insufficient back pressure may cause the motor to overload. Therefore if running close to open discharge seek assistance from your Dealer or contact Reid & Harrison directly. Calculations can be made that will give details of the size of pump required for the task and specifications of performance.


# YARDMASTER® EXTENDER PUMP PERFORMANCE CURVES

Performance Curves - TWO POLE (2800 rpm) - Irrigation Extender Pumps

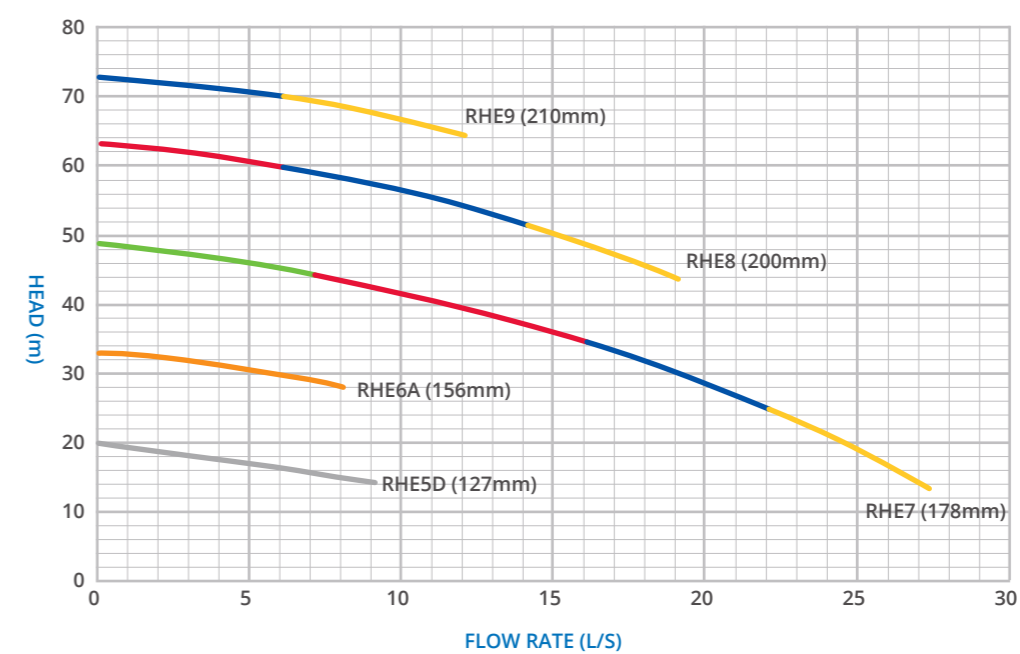


	kW	HP
(Impeller Size)	5.5	7.5
	7.5	10
	11	15
	15	20
	18.5	25
	22	30

Performance Curves - FOUR POLE (1400 rpm)

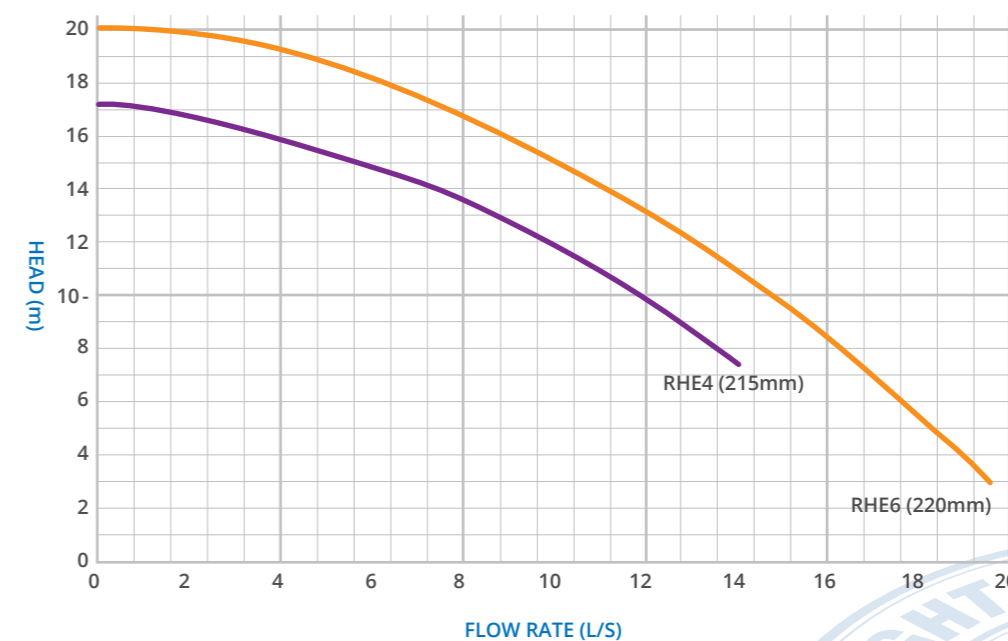

	IMP	kW	HP
	215	4	5
	220	7.5	10


The performance curves stated below are those for water. When slurries, manures and effluents are to be pumped, delivery, head and power will alter. For viscous liquid-solid combinations seek assistance from your agent or contact Reid & Harrison direct. Calculations can be made that will give details of the size of pump required for the task and specifications of performance.

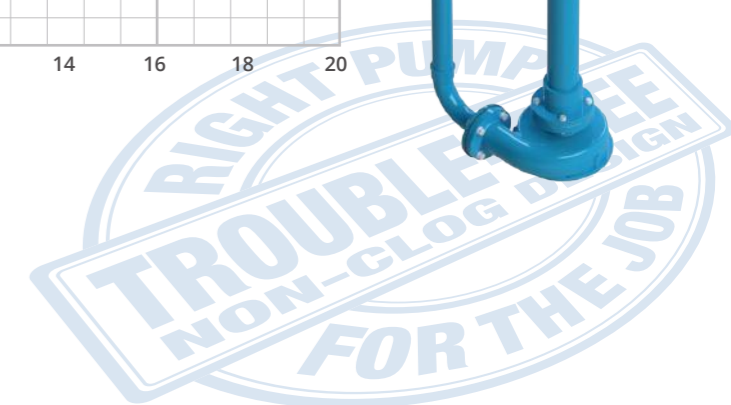



# YARDMASTER® SELF PRIMING MULTI-STAGE PERFORMANCE CURVES

## 2-4 STAGES / PERFORMANCE CURVES - TWO POLE (2950 rpm)


3" x 8m SUCTION LINE USED FOR ALL TESTS

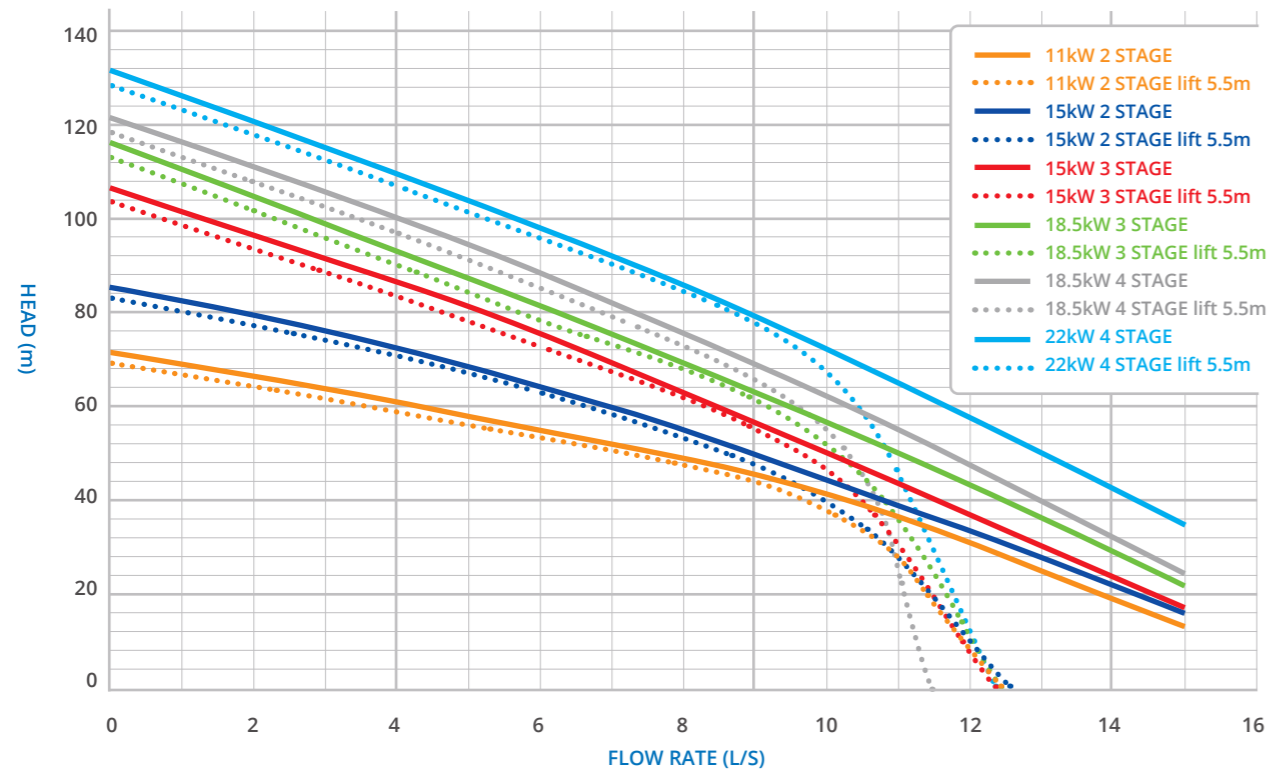

## PRIMING TIME vs SUCTION LIFT - 8m SUCTION LINE

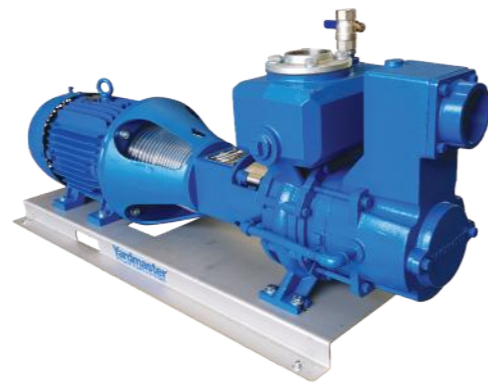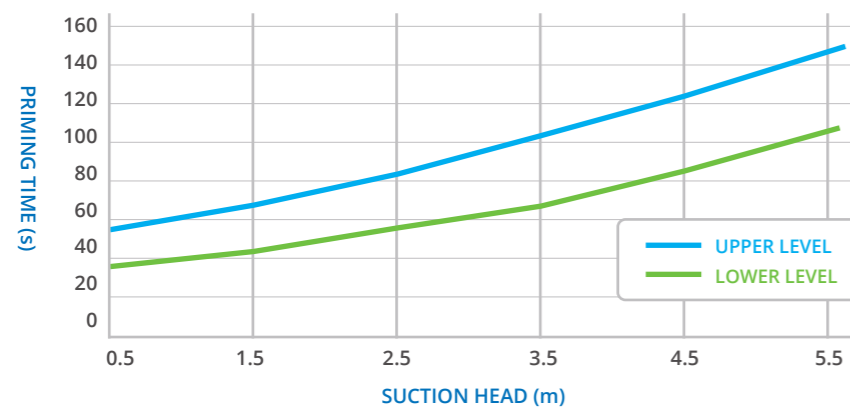



Due to continuous product development, Reid & Harrison reserve the right to change specification without notice. Performance figures are based on average test results from production pumps. Specific performance test curves can be supplied against order

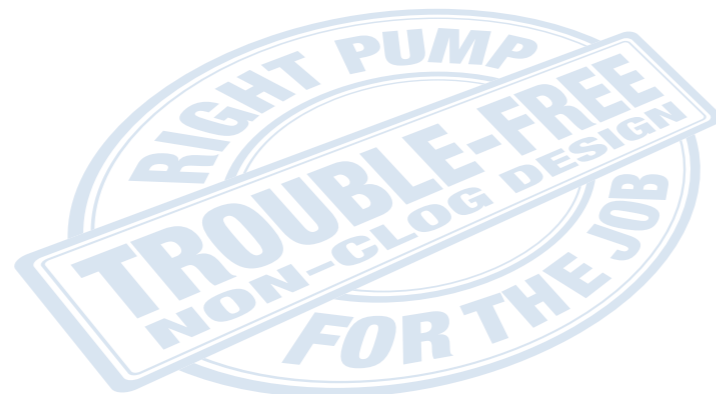


# YARDMASTER® MULTI-STAGE PUMP PERFORMANCE CURVES

## 1-4 STAGES / Performance Curves - TWO POLE (2800 rpm)


IMPELLERS: 1st Stages: 4v, 162 dia. Final Stage: 4v 195 dia

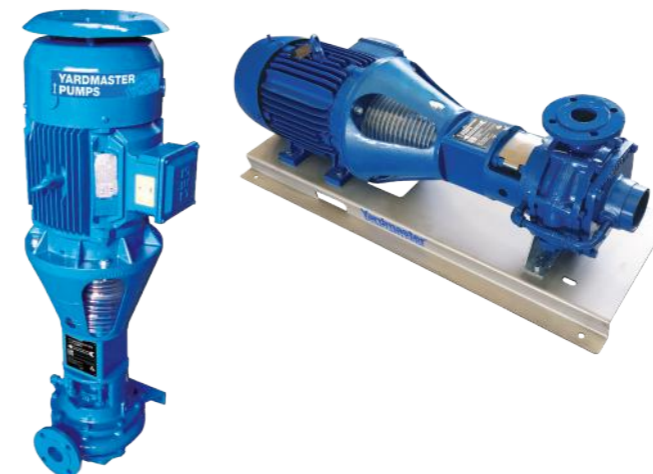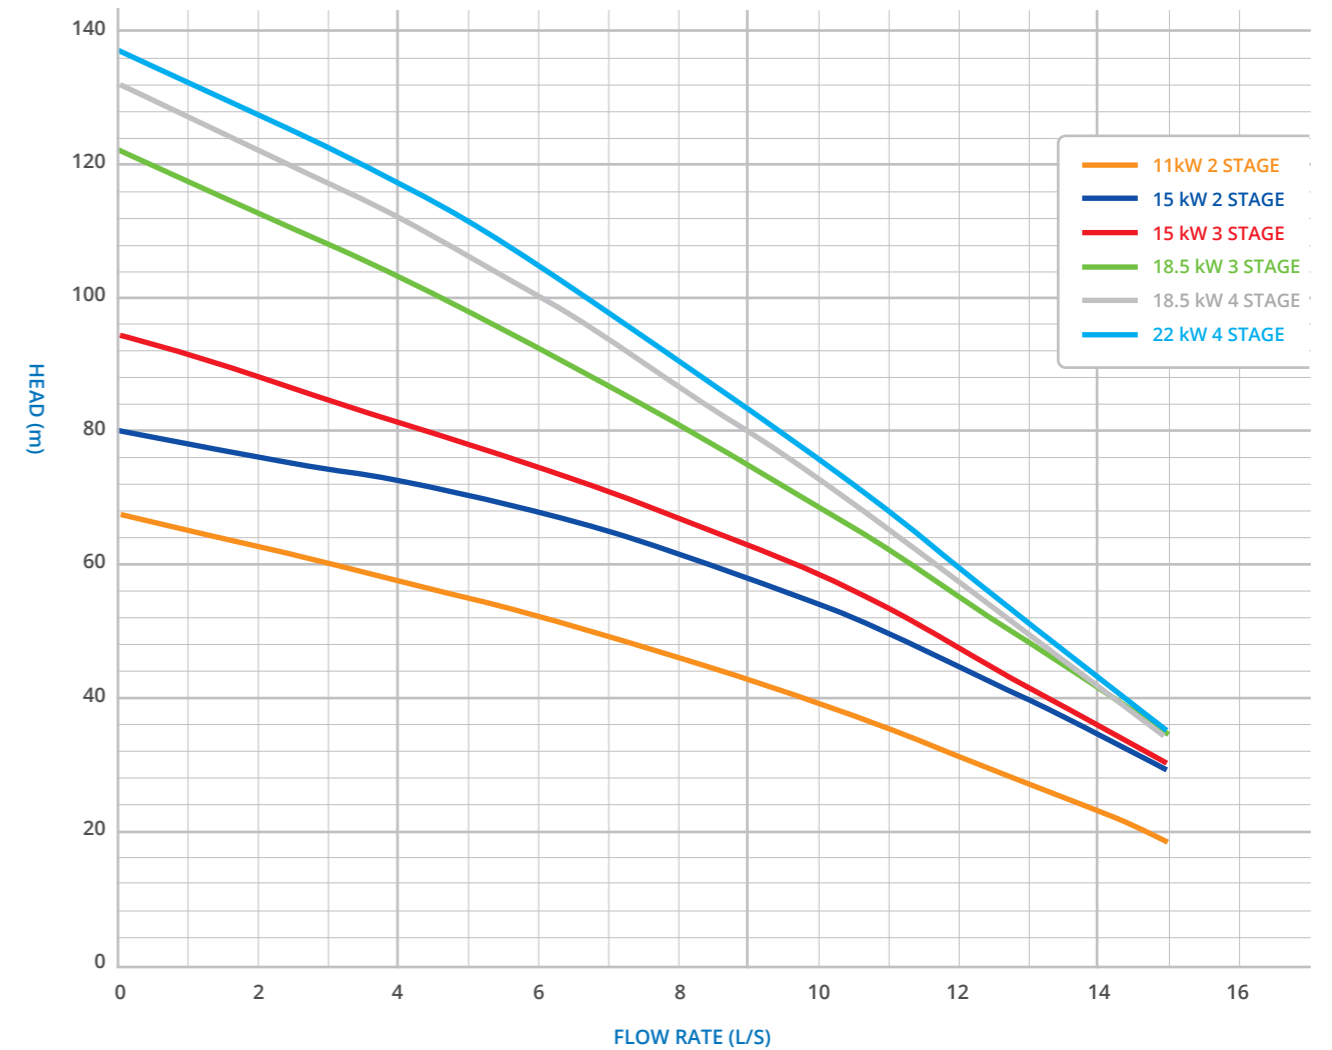


Due to continuous product development, Reid & Harrison reserve the right to change specification without notice. Performance figures are based on average test results from production pumps. Specific performance test curves can be supplied against order

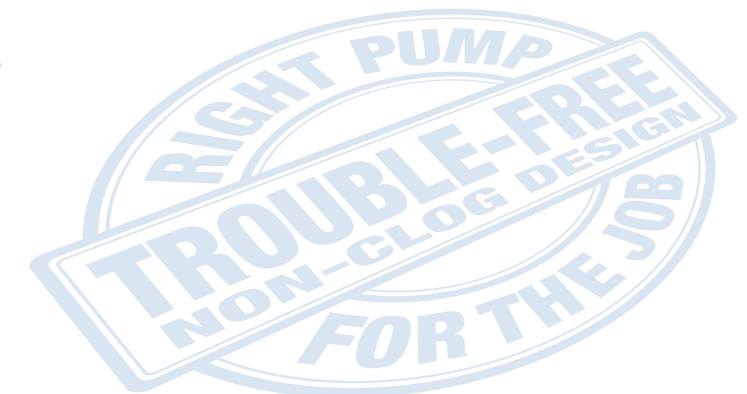





# YARDMASTER® SUBMERSIBLE PUMP PERFORMANCE CURVES

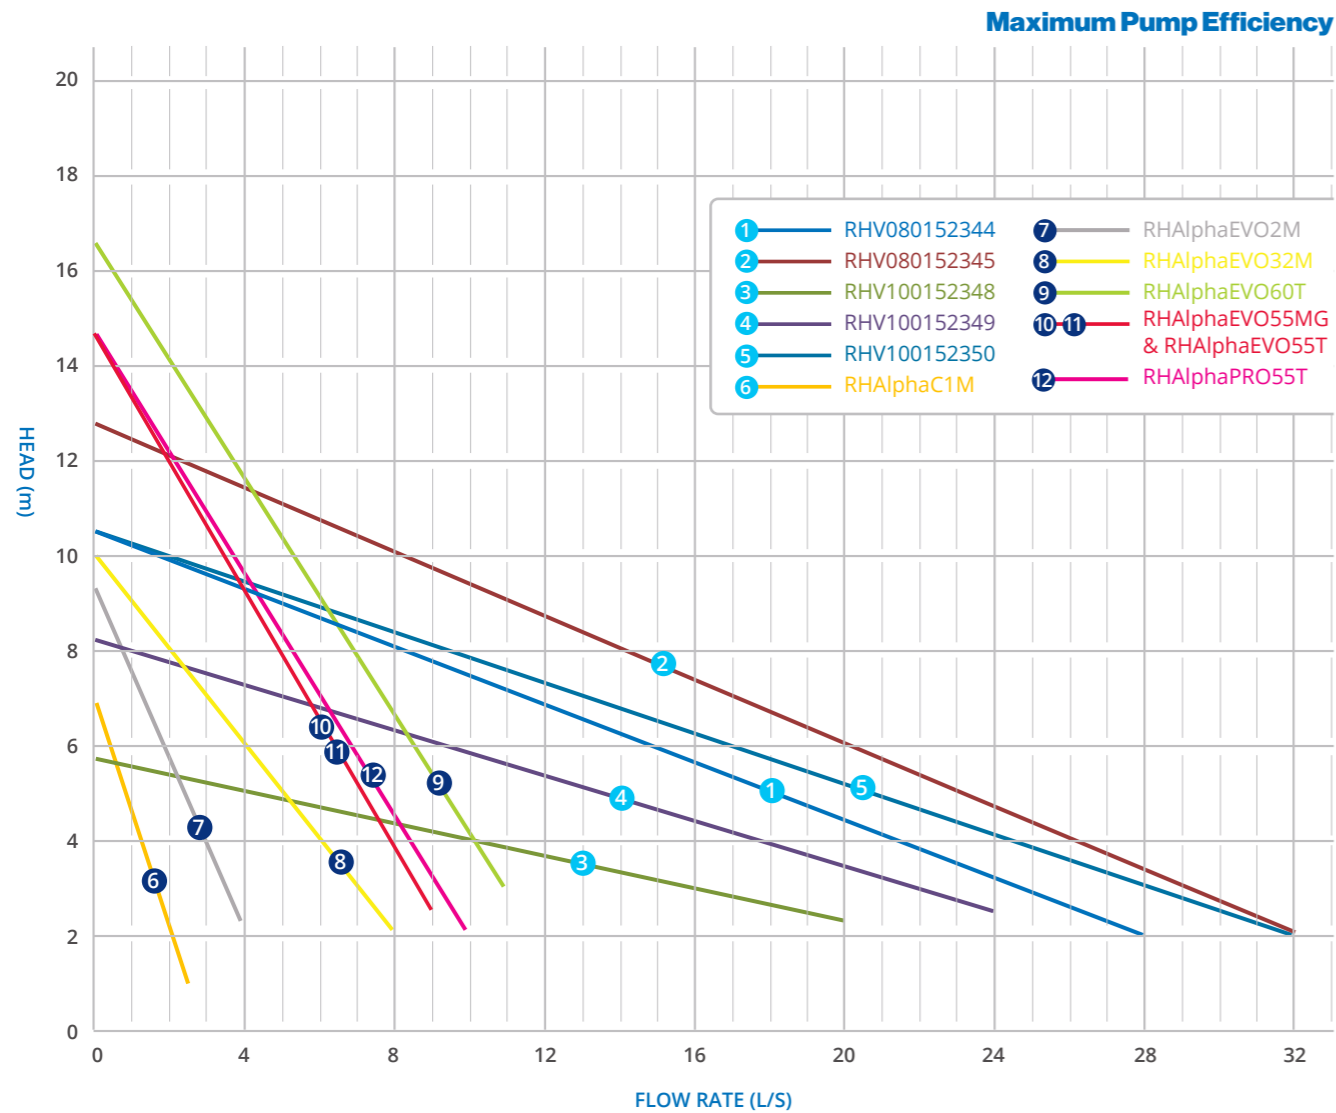

*Due to continuous product development, Reid & Harrison reserve the right to change specification without notice. Performance figures are based on average test results from production pumps. Specific performance test curves can be supplied against order*

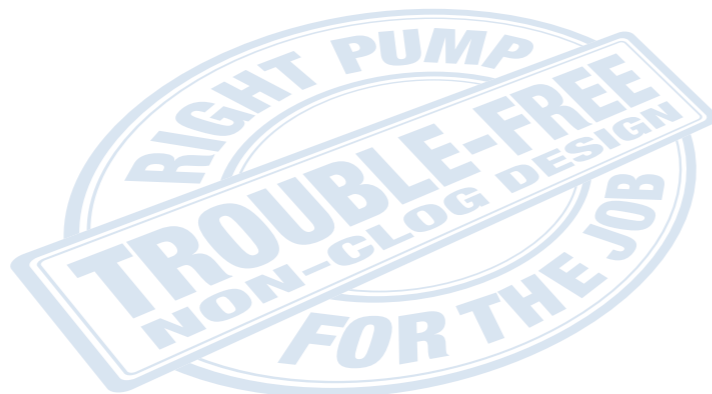

# YARDMASTER® PROGRESSIVE CAVITY PUMP PERFORMANCE CURVES

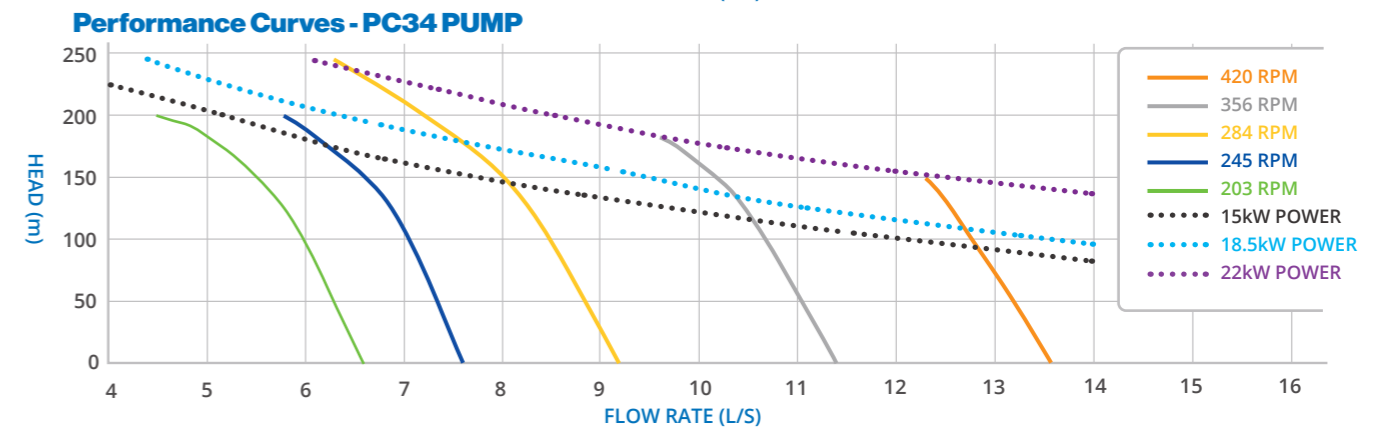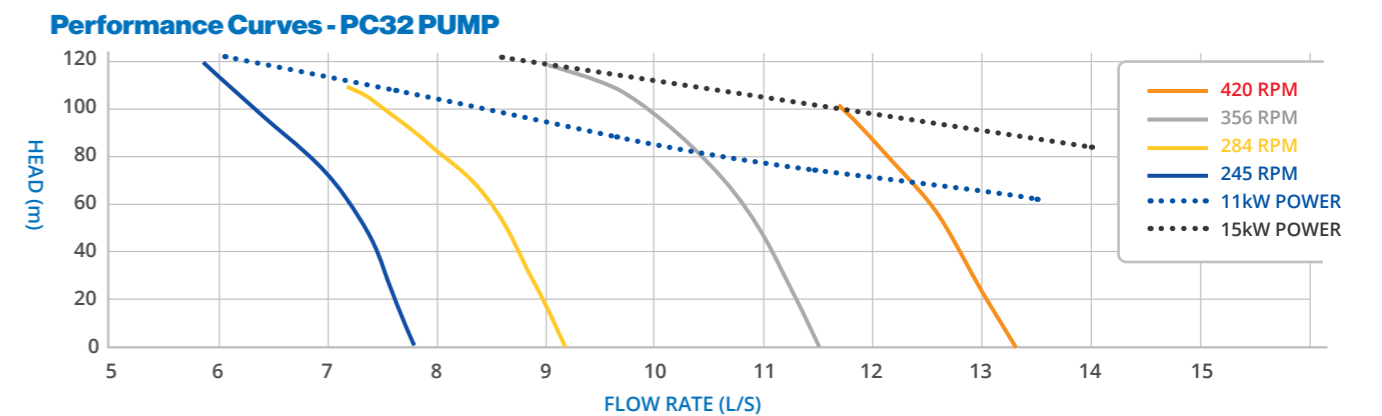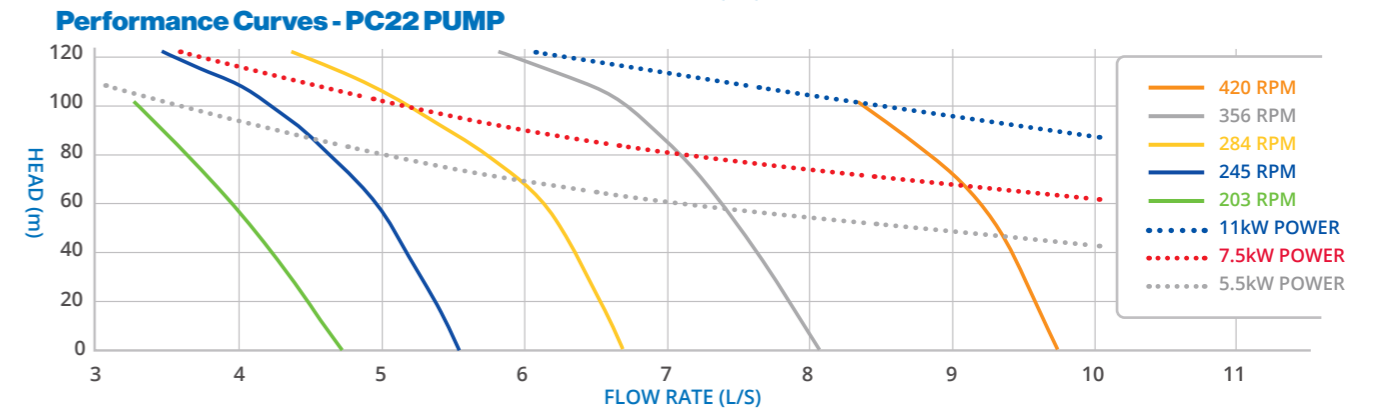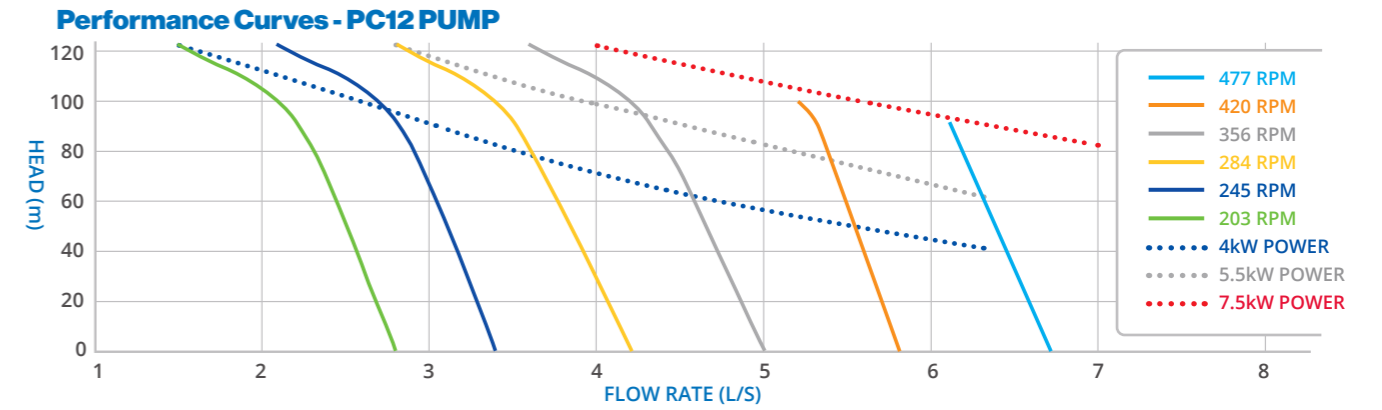



## REID & HARRISON™ Accreditations

---



### DAIRY NZ - FARM DAIRY EFFLUENT SYSTEM (FDES) Design Accredited

The Farm Dairy Effluent System Design Accreditation programme provides a new way forward for Effluent System Design in NZ. The programme goal is to ensure all NZ dairy farmers have effluent systems that can achieve dairy industry and wider communities expectations for the land application of dairy effluent:

