

Specification ST_v20

YARDMASTER® STIRRER

- With a developing need to keep a good solid / liquid mix, the Yardmaster range of stirrers have become a key element of many effluent systems
- Using a 4-pole motor, the Yardmaster stirrer runs through a reduction gearbox to do approximately 100rpm at the propeller
- Available in 3 motor options, there is a stirrer to suit most applications
- Mounting the stirrer can be done in various ways. Where your pontoon provides sufficient buoyancy and size, it can be fitted on a single pontoon with your pump
- Alternatively you can have a separate pontoon for a pump and stirrer. Your stirrer can also be frame mounted, with longer shaft stirrers available for this purpose
- Designed and manufactured in New Zealand for New Zealand conditions


Product Codes (Standard Series)

| DESCRIPTION | CODE |
|--|-------|
| EFFLUENT STIRRER | |
| Yardmaster stirrer complete; RHST2, 2hp | RHST2 |
| Yardmaster stirrer complete; RHST4, 5hp | RHST4 |
| Yardmaster stirrer complete; RHST6, 10hp | RHST6 |

Applications & Case Studies



Specifications are subject to change without notice

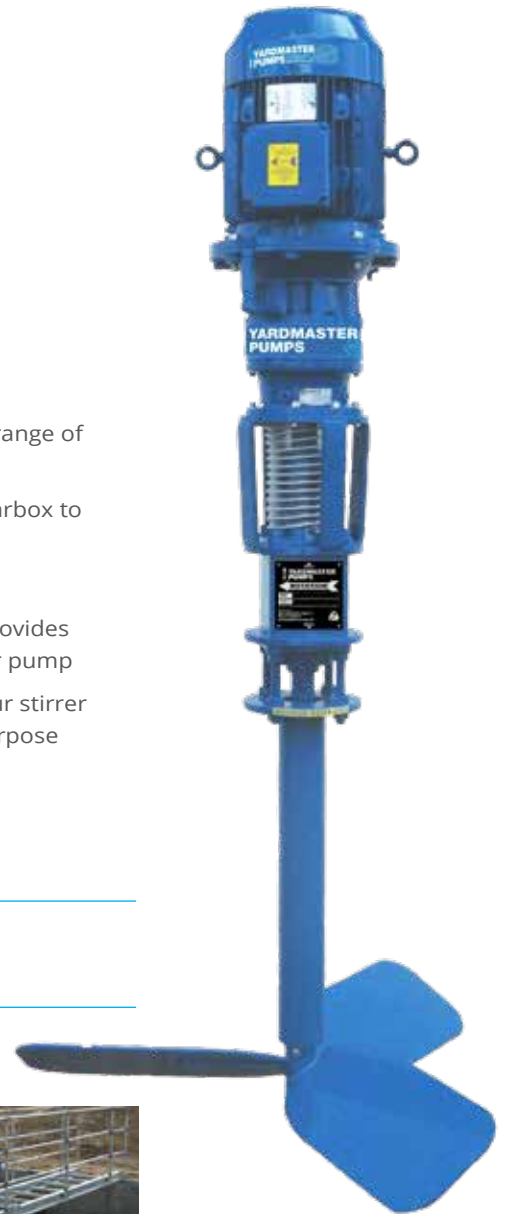

- CS_TRO01**
Pond installation, effluent pump, stirrer and stabilised long arm
- CS_TMC01**
Long shaft stirrer and extender pump on fixed frame over pit
- CS_HED01**
Pit Installation, effluent pump and stirrer and short stabilised arm
- CS_BEN01**
Stirrer in pit, directly off feed pad transferring to separator

